



CW³ DragLink - Dynamic Checkweigher Systems

Designed for Food & Packaging Industries

Product Highlights

- For dynamic weighing of end-of-line products including beverages, cans and jars up to 6Kg
- Complete system available with specification including BRC, IFS, & Retail compliance
- Approved systems to OIML R51 and MID (EC TAC)
- Automatic Mean Weight Correction to help meet weight legislation
- Brushless motors & proven conveyor components designed for reliable 24/7 operation



Simple Operation with Colour Touchscreen

Icon driven full colour touchscreen control interface, including multilevel password access and data logged events to aid traceability



Fast, Simple & Accurate Setup

Type in your product details, initiate setup, and pass a pack several times and the CW3 is automatically set-up and ready to use for average or mean weights



Save Money, Reduce Product Give Away

Using a highly reliable loadcell technology the CW3 gives you accurate readings whilst minimising unnecessary product give away





Product Menu [11/11]			
Number	Name	Nominal Weight	Date Last Used
0	DefaultProduct	100.0g	09:34 01/11/2016
1	Chocolate	200.0g	09:34 01/11/2016
2	Peanuts	50.0g	09:34 01/11/2016
3	Cake bar	50.0g	09:36 01/11/2016
4	Muffin	33.0g	09:38 01/11/2016
5	Bread	300.0g	09:40 01/11/2016
6	Pastry	65.0g	09:45 01/11/2016
7	Tiger Leaf	500.0g	09:51 01/11/2016
8	Dark Choc	28.0g	09:54 01/11/2016
9	Cookies	40.0g	09:57 01/11/2016
10	Crisps	17.0g	10:01 01/11/2016

Switch Products in Seconds with a Library of Stored Products

Up to 500 product calibration details are stored in memory ready for fast product recall using multi-product menus

Technical Specification

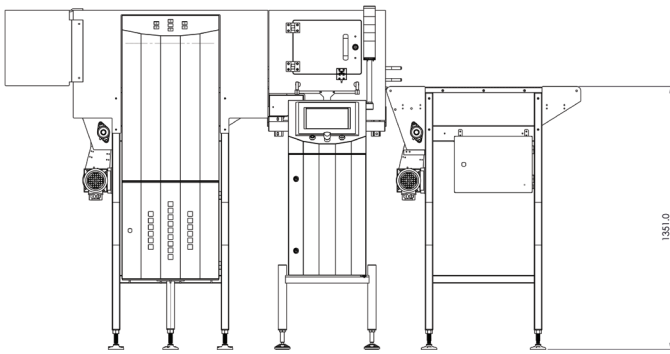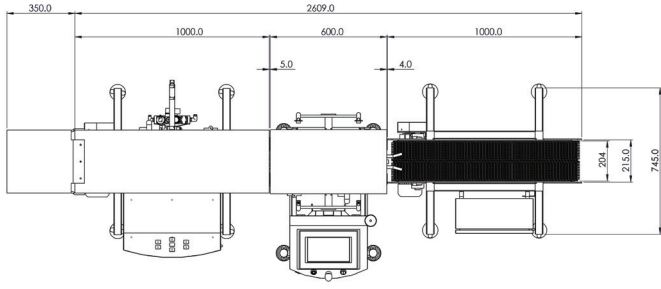

All Measurements in MM

Weight Range (g) MID/R51 Approved	50 - 6000
Weight Range (g) Non - Approved	20 - 6000
Typical Accuracy (g)	0.24
Finish	304 stainless steel
Line Height Options	750,800,850,900,950mm +/- 50mm
Maximum Speed	115m/min
Supply Voltages	110 or 230V/1ph / N+E 50 or 60Hz
Air Supply	5 to 8 Bar (10mm Outside Dia) 72-116 PSI
Operating Temperatures	0-40°C
IP Rating	IP65
Belt Width (Infeed/ Outfeed)	200/300mm (Model Dependent)
Belt Type (Infeed/ Outfeed)	PU Anti Static
Weigh Table	Nylatron GS 1/4 Chain x 3
Reporting	Batch, Shift
Data Retrieval	Via USB, Ethernet, Enet, Tracs

Automatic Reject Options

The CW³ is supplied as standard with two output signals suitable for triggering third-party reject systems. Alternatively, it can be specified with an automatic reject station (with retail compliance) with the following options:

- Pusher
- Diverter
- Air Blast

