


DELTA 6000 3SS C

FLEXIBLE PACKAGING SOLUTIONS

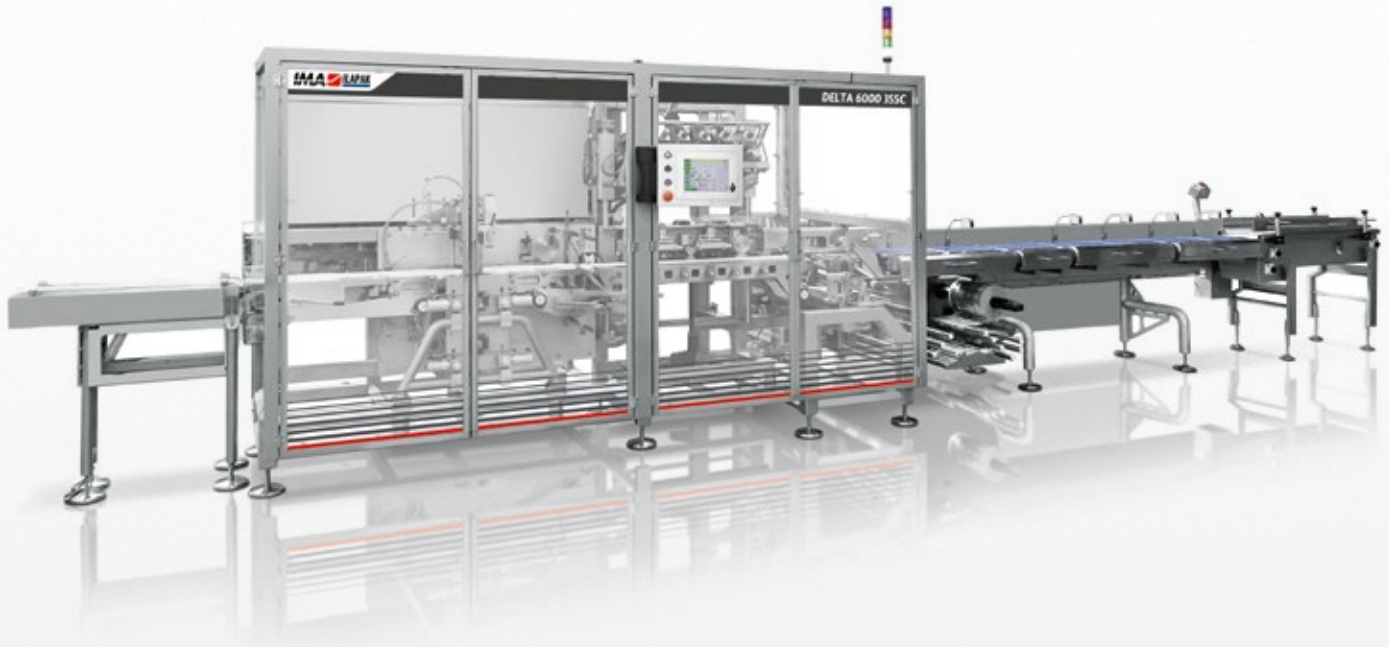

MAIN FEATURES


- 1** • Flexible packaging machine to perform standard pillow and 3SS pack styles
- 2** • Modular construction design
- 3** • Electronic machine with commercial available components
- 4** • High speed long dwell sealing jaws technology

BENEFITS


- 1** • Machine capable of performing different pack styles to meet wider market requirements - Automated and easy pack style change
- 2** • Possibility to expand the machine option configuration & connect the machine with different feeding system
- 3** • Higher reliability components - Easy maintenance
- 4** • To perform hermetic sealing while managing a wide range of wrapping material characteristics

Open frame flow wrapping machine with long dwell technology to cover the widest range of pack styles including high-speed zipper with MAP. Its specific mechanical design, driven by servo motors and PC control platform makes it not only easy, fast and reliable in size change operations but also when automatically changing to different packaging style, i.e. from standard pillow pack to the three (3) side seal pack style. The Delta 6000 3SSC includes the latest hygienic design requirements, stainless steel construction and a wide range of re-closable packaging solutions.

TECHNICAL DATA

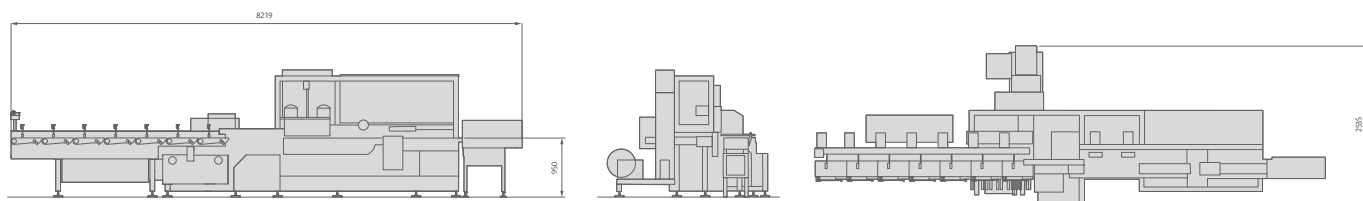

Machine Speed	Up to 130 cycles per minute (with zipper), up to 150 cycles per minute (without zipper) Production output depends on film sealability, product characteristics and product dimensions
Film Cut-Off	Min 150mm* - 5.9" / Max 600mm - 23.6" Depending on film and product characteristics
Wrapping Materials	Barrier laminate film, flanged zipper type ZE 100
Film Reel Max Weight	Depending on film reel width, up to 75 kg - 165 lbs
Electronic Platform	Industrial PC
Power Requirement	From 220 to 480 V, 50/60 Hz, 5kVA
Compressed Air	6 bar, 200 l/min
Machine Weight	1500 Kg - 3300 lbs
PRODUCT DIMENSIONS	
length	Up to 500mm - 11.8" standard
width	Up to 120mm - 4.7" standard (without zipper) Up to 100mm - 3.9" standard (with zipper)
height	Up to 150mm - 5.9" standard
FILM REEL DIMENSIONS	
coreø	76.2mm - 3" standard
outerø	400mm - 15.8" standard
width	max 500mm - 19.7" standard



ILAPAK INTERNATIONAL S.A.

P.O. Box 756 • CH 6916 Grancia • Switzerland
 Phone: 0041 (0)91 960 5900 • Fax 0041 (0)91 960 5992
 marketing@ilapak.com • ilapak.com • ima.it

