

DELTA 6000 BM

FLEXIBLE PACKAGING SOLUTIONS



MAIN FEATURES



- 1 • Hygienic design
- 2 • Modular construction design
- 3 • Top of the range seal strength
- 4 • Electronic machine with commercial available components

BENEFITS

- 1 • Inhibition of bacterial proliferation - Minimise cleaning time
- 2 • Easy maintenance - Possibility to expand the machine option configuration & connect the machine with different feeding system
- 3 • Isolation of product from external contamination sources - Maximise shelf life while minimising spoilage
- 4 • Higher reliability components - Easy maintenance

Strong hermetic seals, complete flexibility and rugged, ultra-hygienic full stainless-steel construction characterise the all new Delta 6000 BM, a system designed to allow customers to replace their more expensive pre-made bag solutions with lower cost film from a reel. Available as a top or bottom reel machine, the Delta 6000 BM is particularly suited to lines running a variety of products, such as larger foodservice blocks of cheese, different sized cuts of primal fresh meat and processed meat, as the machine automatically cuts the pack size to each product's dimensions.

TECHNICAL DATA

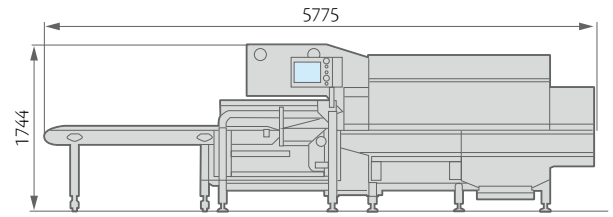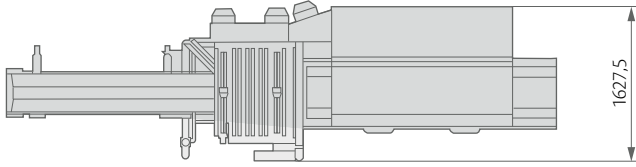

Machine Speed	Up to 60 cycles per minute. Production output depends on film sealability and product characteristics.	
Film Cut-Off	Min 150mm - 6" / Max 800mm - 31.5" Depending on film and product characteristics.	
Wrapping Materials	Shrink barrier films, laminated, co-extruded and all sealable films.	
Film Reel Max Weight	Standard version: Depending on film reel width, up to 75 kg - 165 lbs XL version: Depending on film reel width, up to 90 kg - 200 lbs	
Electronic Platform	Industrial PC On request different electronic control platform are available i.e. Allen Bradley, Siemens, Schneider-Elau, B&R.	
Power Requirement	From 220 to 480 V, 50/60 Hz, 7kVA	
Compressed Air	6 bar, 200 l/min	
Machine Weight	1500 Kg - 3300 lbs	
PRODUCT DIMENSIONS	STANDARD VERSION	XL VERSION
length	Up to 650mm - 25.6"	Up to 650mm - 25.6"
width	320mm - 12.6" (jaws 350mm - 13.7") 420mm - 16.5" on request (jaws 450mm 17.7")	520mm - 20.5"
height	Up to 230mm - 9", with small product traps	Up to 320 mm-12.6", with small product traps
FILM REEL DIMENSIONS	STANDARD VERSION	XL VERSION
coreø	76.2mm - 3" 152.4mm - 6" on request	
outerø	400mm - 15.7"	
width	800mm - 31.5" 900mm - 35.4" available as an option	1200mm - 47.2"