

DELTA 6000 PHARMA

FLEXIBLE PACKAGING SOLUTIONS



MAIN FEATURES



- 1 • Hygienic design
- 2 • Modular construction design
- 3 • Electronic machine with commercial available components
- 4 • High speed long dwell sealing jaws technology , single or mutiple jaws option

The Delta 6000 is a fully modular design flow wrapping machine that offers high-speed long dwell single jaws up to 200ppm and multiple jaws up to 400ppm. Its heavy duty and reliable design allows the Delta 6000 to be integrated in automatic packaging lines. IMA-Ilapak's Delta 6000 offers as option wide solutions of features such as printing OCR/OCV, automatic feeding, 21 CFR Part 11 and clean room compliance. Machines are available in stainless steel or painted finish, top and bottom film feeding.

BENEFITS

- 1 • Higher degree of machine cleaning - Easier cleaning process - Possibility to install the machine in harsh environment
- 2 • Possibility to expand the machine option configuration & connect the machine with different feeding system
- 3 • Higher reliability components - Easy maintenance
- 4 • To perform hermetic sealing while managing a wide range of wrapping material characteristics

TECHNICAL DATA

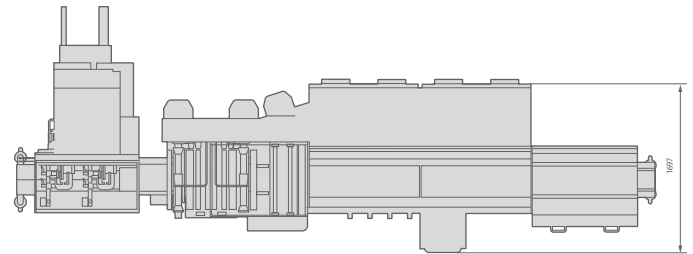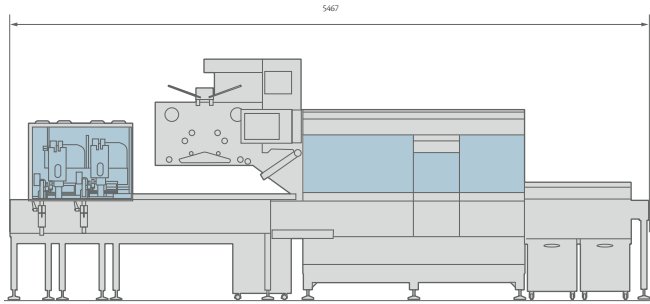

Machine Speed	Up to 400 cycles per minute Production output depends on film sealability and product characteristics
Film Cut-Off	Min 60mm - 2.4" / Max 600mm - 24" Depending on film and product characteristics
Wrapping Materials	Alu based material, laminated, co-extruded and all sealable films
Film Reel Max Weight	Depending on film reel width, up to 75 kg - 165 lbs
Electronic Platform	Industrial PC
Power Requirement	From 220 to 480 V, 50/60 Hz, 7kVA
Compressed Air	6 bar, 200 l/min
Machine Weight	1400 Kg - 3100 lbs
PRODUCT DIMENSIONS	
length	Up to 500mm - 20" standard
width	Up to 300mm - 11.8" standard
height	Up to 110mm - 4.3" standard
FILM REEL DIMENSIONS	
coreø	76.2mm - 3" standard 152.4mm - 6" on request
outerø	400mm - 15.7"
width	500mm - 19.7" standard 650mm - 25.6" on request