


DELTA EZ

FLEXIBLE PACKAGING SOLUTIONS

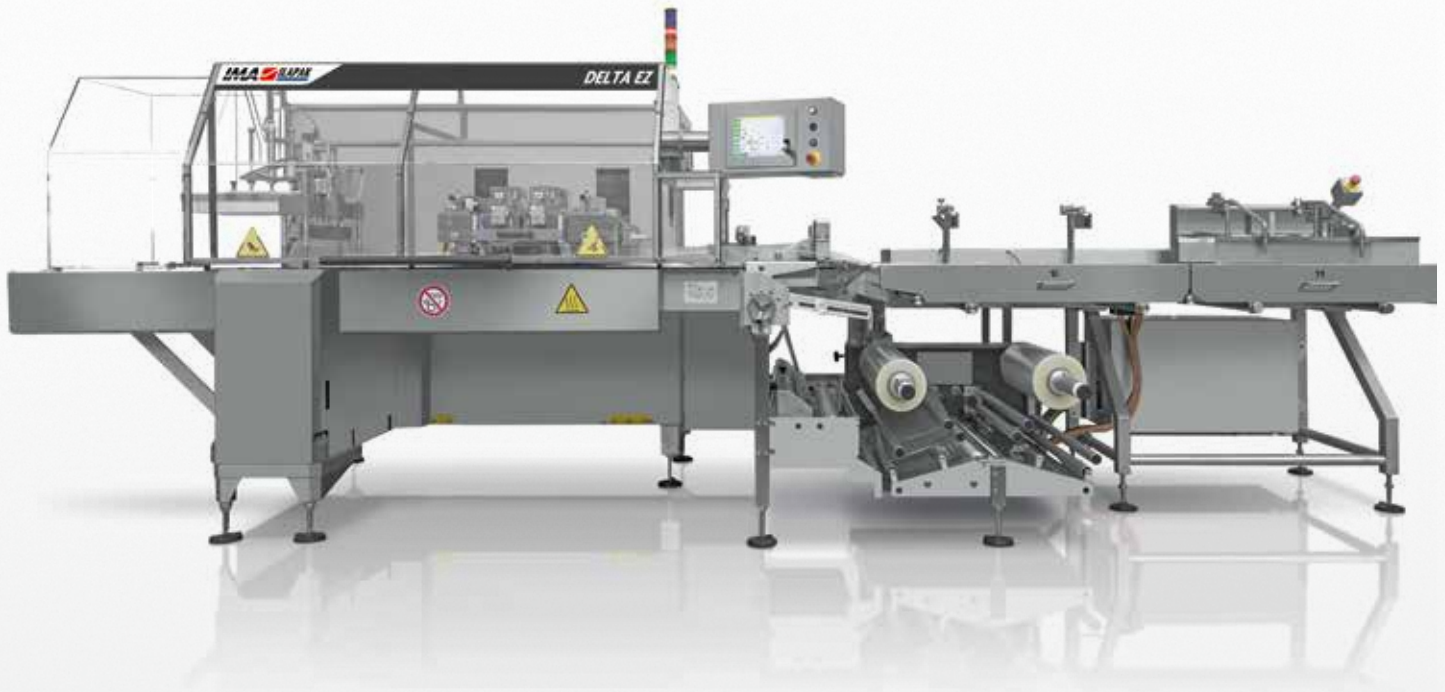

MAIN FEATURES


- 1** • Independently driven longitudinal sealing rollers & long-dwell transversal sealing system
- 2** • In-built MAP gas flushing
- 3** • Modular design philosophy
- 4** • Electronic machine with commercial available components

BENEFITS

- 1** • Maximum flexibility in terms of substrates, granting excellent sealing performances
- 2** • Extended product shelf life
- 3** • Easy re-configuration to incorporate additional modules such as a reclosable feature or accessories as double reel mounting, auto splicing, euro hook etc.
- 4** • Higher reliability components - Easy maintenance

IMA-Ilapak is once again showing its commitment to the Bakery industry with the launch of this new flow wrapping machine for tortilla and flatbread applications. Responding to the budget and performance demands of mid-sized bakeries, the Delta EZ combines an affordable price tag with the ability to produce hermetically sealed extended shelf life packs at speeds of up to 100ppm, thanks to an innovative longitudinal sealing system.

TECHNICAL DATA

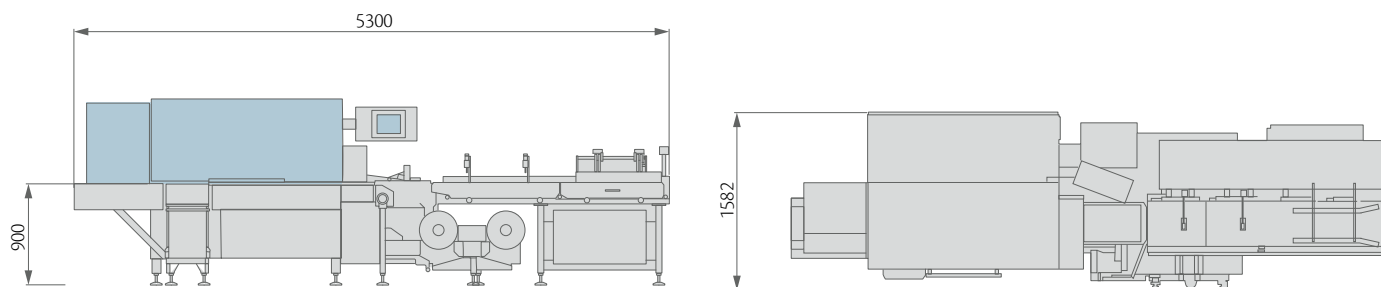

Machine Speed	Up to 100 cycles per minute. Production output depends on film sealability and product characteristics
Film Cut-Off	Min 150mm - 6" / Max 800mm - 31.5" Depending on film and product characteristics
Wrapping Materials	Shrink barrier films, laminated, co-extruded and all sealable films
Film Reel Max Weight	Depending on film reel width, up to 50 kg - 110 lbs
Electronic Platform	Industrial PC
Power Requirement	From 220 to 480 V, 50/60 Hz, 10 kW
Compressed Air	6 bar, 200 l/min
Machine Weight	1500 Kg - 3300 lbs
PRODUCT DIMENSIONS	
length	Up to 650mm - 25.6" standard
width	300mm - 11.8" standard (jaws 345mm - 13.6") 360mm - 14.2" on request (jaws 445mm - 17.5")
height	Up to 100mm - 4.0" standard
FILM REEL DIMENSIONS	
coreø	76.2mm - 3" standard 152.4mm - 6" on request
outerø	350mm - 13.8" standard
width	900mm - 35.5" standard