

VEGATRONIC 500 INCLINED

INTERMITTENT VERTICAL FORM, FILL & SEAL MACHINE



MAIN FEATURES




- 1 Gentle product-handling execution
- 2 Entry-level design
- 3 Compact footprint
- 4 Low product drop

BENEFITS

- 1 Suitable to run a variety of fragile and brittle products, both dry and fresh
- 2 Lowest cost of ownership and lowest cost per pack
- 3 Reduced cost for floor space
- 4 Easy change-over

IMA Ilapak's Vegatronic 500 INCLINED is an economical compact foot-print machine in gentle product-handling execution.

TECHNICAL DATA

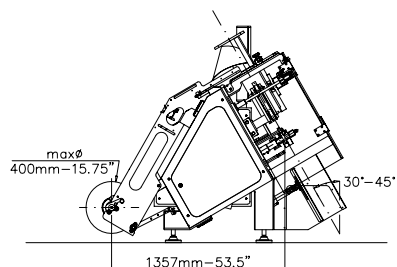

| | |
|--------------------------------|---|
| Machine Speed | 60 cpm |
| Wrapping Materials | Heat sealable materials (laminate, co-extruded, recyclable, etc.), polyethylene |
| Electronic Platform | Omron PLC, Allen Bradley PLC*, Siemens PLC* |
| Program Memory | 40 programs |
| HMI | Colour TFT 6" touch screen, Allen Bradley*, Siemens* |
| Power Requirement | AC 400 V ± 5%, 3 phase, neutral, 50/60 Hz, 5.5 kW, 9 A |
| Compressed Air | up to 125 l/min at 5 bar (72.5 psi), up to 225 l/min at 5 bar (72.5 psi) for LDPE |
| Electrical cabinet | Remote |
| Machine dimensions (W x D x H) | 1142 x 2203 x 1463 mm (45 x 86.75 x 1463") |
| Machine finishing | Electrostatic epoxy powder coating, stainless steel* |
| Machine Weight | 750 kg (1655 lbs) |
| BAG DIMENSIONS | |
| Max. width | 280 mm (11"), 270 mm (11.75") for LDPE |
| Min. width | 50 mm (2") |
| Max. length** | 330 mm (13") |
| FILM REEL DIMENSIONS | |
| Max. width | 580 mm (22.75"), 630 mm (24.75")* |
| Max. outer diameter | 400 mm (15.75") |
| Core diameter | 76 mm (3"), 152 mm (6")* |

* optional

** greater length feasible on request