

VEGATRONIC 1600

INTERMITTENT VERTICAL FORM, FILL & SEAL MACHINE



MAIN FEATURES




- 1 Open Frame entry-level VFFS
- 2 X-Large bag capability
- 3 Wide range of pack styles
- 4 Vertical or inclined execution available
- 5 Extreme sealing pressure

BENEFITS

- 1 Unique design in its market segment - Easy monitoring - Easy access for maintenance
- 2 Ideal for food-service applications in dry or wet environments
- 3 Can run pillow bags, block bottom and Quattro with large film width
- 4 Extreme versatility on films, very thick laminate, paper and LDPE - Suitable for MAP applications
- 5 Great accuracy and bag presentation

IMA Ilapak's Vegatronic 1600 is the ideal intermittent machine for large bags in a variety of pack styles for both retail and food-service applications.

TECHNICAL DATA

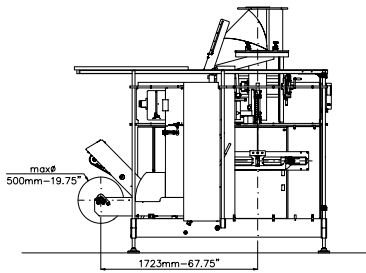

Machine Speed	60 cpm
Wrapping Materials	Heat sealable materials (laminate, co-extruded, recyclable, etc.), polyethylene
Electronic Platform	Omron PLC, Allen Bradley PLC*, Siemens PLC*
Program Memory	40 programs
HMI	Colour TFT 6" touch screen, Allen Bradley*, Siemens*
Power Requirement	400 Vac±5%, 3 ph, neutral, GND, 50/60 Hz, 8.7 kW, 12.5 A
Compressed Air	up to 125 l/min at 5 bar (72.5 psi), up to 225 l/min at 5 bar (72.5 psi) for LDPE
Electrical cabinet	Right-hand version, left-hand version*
Machine dimensions (W x D x H)	1918 x 2762 x 2172 mm (75.5 x 108.75 x 85.5")
Machine finishing	Electrostatic epoxy powder coating, stainless steel*
Machine Weight	2200 kg (4850 lb)
BAG DIMENSIONS	
Max. width	580 mm (22.75"), 570 mm (22.5") for LDPE
Min. width	100 mm (4")
Max. length**	680 mm (26.75")
FILM REEL DIMENSIONS	
Max. width	1180 mm (46.5")
Max. outer diameter	500 mm (19.75")
Core diameter	76 mm (3"), 152 mm (6")*

* optional

** greater length feasible on request