

VEGATRONIC 2000HD

INTERMITTENT VERTICAL FORM, FILL & SEAL MACHINE



MAIN FEATURES


- 1 Ultra-sanitary intermittent motion machine
- 2 Revolutionary Open Frame design
- 3 Extreme sealing pressure
- 4 Maximum versatility
- 5 Ultrasonic sealing option

BENEFITS

- 1 Wash-down execution - Limited areas to accumulate debris
- 2 Easy monitoring - Easy access for maintenance
- 3 Ideal for MAP applications
- 4 Can run a variety of pack styles (pillow, BB, Quattro, Doy-style, Flexcan, Easypack etc.) and options (reclosable zipper, hang-holes etc.)
- 5 Ultrasonic seal for drastic reduction of leak rate, energy consumption and great film savings

Unrivalled HYGIENIC intermittent motion machine with unlimited accessibility for easy maintenance and fast troubleshooting. Ideal in a number of industries such as IQF food, Produce, Dairy and many others. Can run a variety of pack styles with or without reclosable zipper options. Greatest uptime at lowest Total Cost of Ownership (TCO).

TECHNICAL DATA

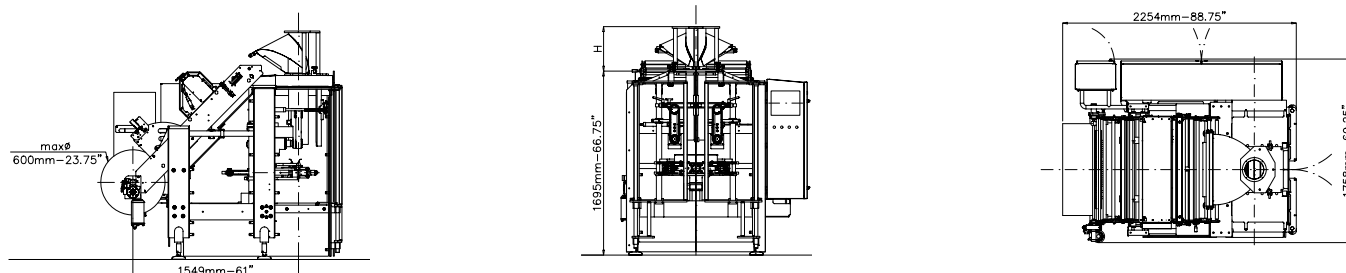

Machine Speed	90 cpm
Wrapping Materials	Heat sealable materials (laminate, co-extruded, recyclable, etc.), polyethylene
Electronic Platform	Industrial PC, Allen Bradley PLC*, Siemens PLC*
Program Memory	100+ programs
HMI	12" HMI colour touch screen TFT SVGA resolution, Allen Bradley*, Siemens*
Power Requirement	400 Vac \pm 5%, 3 ph, neutral, GND, 50/60 Hz, 12.1 kW, 17.5 A
Compressed Air	up to 125 l/min at 5 bar (72.5 psi), up to 225 l/min at 5 bar (72.5 psi) for LDPE
Electrical cabinet	Right-hand version, left-hand version* or remote cabinet*
Machine dimensions (W x D x H)	1758 x 2254 x 1695 (69.25 x 88.75 x 66.75")
Machine finishing	Stainless steel
Machine Weight	1500 kg (3300 lb)
BAG DIMENSIONS	
Max. width	430 mm (16.75"), 420 mm (16.5") for LDPE
Min. width	50 mm (2")
Max. length**	580 mm (22.75")
FILM REEL DIMENSIONS	
Max. width	880 mm (34.5"), 930 mm (36.5")*
Max. outer diameter	600 mm (23.75")
Core diameter	76 mm (3"), 152 mm (6")*

* optional

** greater length feasible on request