


VEGATRONIC 2000RJ

INTERMITTENT VERTICAL FORM, FILL & SEAL MACHINE

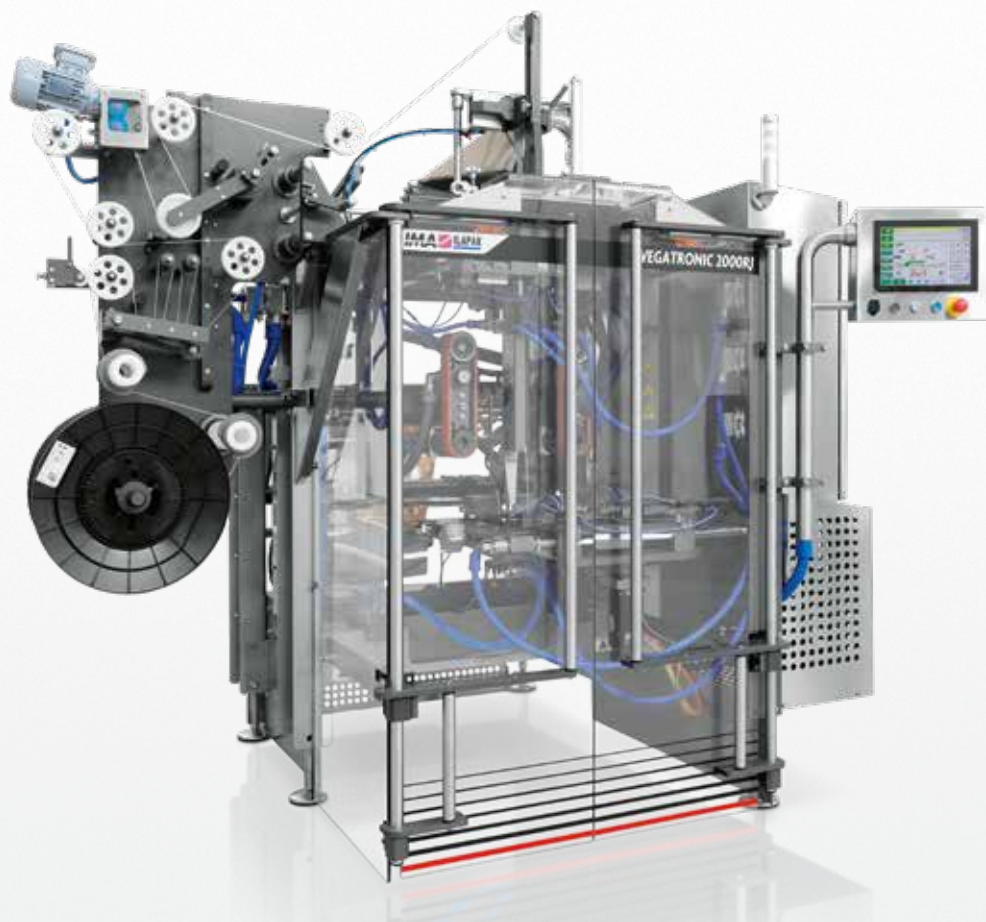

MAIN FEATURES




- 1 Maximum versatility
- 2 High-efficiency intermittent VFFS machine
- 3 Hygienic Open Frame design
- 4 Extreme sealing pressure

BENEFITS

- 1 Can run a variety of pack styles (pillow, BB, Quattro, Flexcan, Easypack, Shark pouch) and seal options (reclosable zipper, different hang-holes etc.)
- 2 Lowest cost of ownership and lowest cost per pack
- 3 Easy access to all machine components - Easy monitoring
- 4 Can handle thick films and guarantee tight seals for MAP applications

IMA Ilapak's Vegatronic 2000 RJ is today's most flexible intermittent machine. Excellent sanitary design, great accessibility and a variety of pack styles including Doy-style pouches with or without reclosable zipper make this machine unique and ideal in a number of industries such as Dairy, Confectionery, Snacks, Bakery, IQF food and many others.

TECHNICAL DATA



| | |
|--------------------------------|---|
| Machine Speed | 90 cpm |
| Wrapping Materials | Heat sealable materials (laminate, co-extruded, recyclable, etc.), polyethylene |
| Electronic Platform | Industrial PC, Allen Bradley PLC*, Siemens PLC* |
| Program Memory | 100+ programs |
| HMI | 12" HMI colour touch screen TFT SVGA resolution, Allen Bradley*, Siemens* |
| Power Requirement | 400 Vac \pm 5%, 3 ph, neutral, GND, 50/60 Hz, 12.1 kW, 17.5 A |
| Compressed Air | up to 125 l/min at 5 bar (72.5 psi), up to 225 l/min at 5 bar (72.5 psi) for LDPE |
| Electrical cabinet | Right-hand version, left-hand version* or remote cabinet* |
| Machine dimensions (W x D x H) | 2688 x 2417 x 1745 mm (105.75 x 92.25 x 68.75") |
| Machine finishing | Electrostatic epoxy powder coating, stainless steel* |
| Machine Weight | 1600 kg (3530 lb) |
| BAG DIMENSIONS | |
| Max. width | 430 mm (16.75"), 420 mm (16.5") for LDPE |
| Min. width | 50 mm (2") |
| Max. length** | 580 mm (22.75") |
| FILM REEL DIMENSIONS | |
| Max. width | 880 mm (34.5"), 930 mm (36.5")* |
| Max. outer diameter | 600 mm (23.75") |
| Core diameter | 76 mm (3"), 152 mm (6")* |

* optional

** greater length feasible on request