

# VEGATRONIC 2300

INTERMITTENT VERTICAL FORM, FILL & SEAL MACHINE



## MAIN FEATURES




- 1 Hygienic Open Frame design
- 2 Extreme compact footprint
- 3 Maximum versatility
- 4 Ultrasonic sealing option

## BENEFITS

- 1 Lowest cost of ownership and lowest cost per pack
- 2 Easy access to all machine components - Easy monitoring - Fast change-over - Wash-down execution
- 3 Wide range of pack styles (pillow, BB, Quattro, Flexcan, Easypack, Shark pouch) and films (laminate, LDPE, paper etc.)
- 4 Ultrasonics: drastic reduction of leak rate, film savings, energy saving

IMA Ilapak's Vegatronic 2300 is today's most innovative and compact intermittent machine. Excellent sanitary design, reduced footprint, great accessibility and a variety of pack styles make this machine unique and ideal in a number of industries such as IQF food, Produce, Dairy, Bakery, Confectionery and many others.

# TECHNICAL DATA

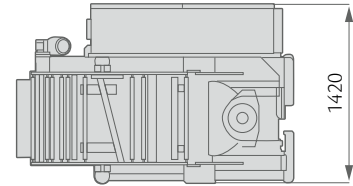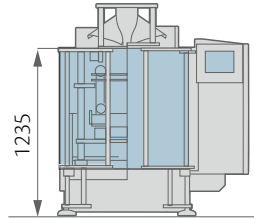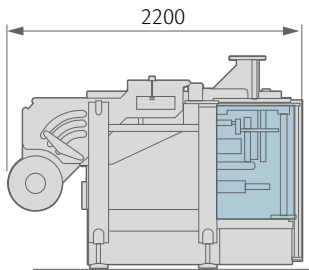

|                                |                                                                                   |
|--------------------------------|-----------------------------------------------------------------------------------|
| Machine Speed                  | 100 cpm                                                                           |
| Wrapping Materials             | Heat sealable materials (laminate, co-extruded, recyclable, etc.), polyethylene   |
| Electronic Platform            | Industrial PC, Allen Bradley PLC*, Siemens PLC*                                   |
| Program Memory                 | 100+ programs                                                                     |
| HMI                            | 12" HMI colour touch screen TFT SVGA resolution, Allen Bradley*, Siemens*         |
| Power Requirement              | 400 Vac± 5%, 3 ph, neutral, GND, 50/60 Hz, 12.1 kW, 17.5 A                        |
| Compressed Air                 | up to 125 l/min at 5 bar (72.5 psi), up to 225 l/min at 5 bar (72.5 psi) for LDPE |
| Electrical cabinet             | Right-hand version, left-hand version* or remote cabinet*                         |
| Machine dimensions (W x D x H) | 1420 x 2201 x 1235 mm ( 55.75 x 86.75 x 1235")                                    |
| Machine finishing              | Electrostatic epoxy powder coating, stainless steel*                              |
| Machine Weight                 | 1400 kg (3090 lb)                                                                 |
| <b>BAG DIMENSIONS</b>          |                                                                                   |
| Max. width                     | 280 mm (11"), 270 mm (10.5") for LDPE                                             |
| Min. width                     | 50 mm (2")                                                                        |
| Max. length**                  | 380 mm (15")                                                                      |
| <b>FILM REEL DIMENSIONS</b>    |                                                                                   |
| Max. width                     | 580 mm (22.75"), 630 mm (24.75")*                                                 |
| Max. outer diameter            | 400 mm (15.75")                                                                   |
| Core diameter                  | 76 mm (3"), 152 mm (6")*                                                          |

\* optional

\*\* greater length feasible on request