

# VEGATRONIC 6000

CONTINUOUS VERTICAL FORM, FILL & SEAL MACHINE



## MAIN FEATURES




- 1 High-speed continuous VFFS machine
- 2 Hygienic Open Frame design
- 3 High versatility
- 4 Ultrasonic sealing option

## BENEFITS

- 1 Top performance with lowest cost of ownership
- 2 Easy access to all machine components - Easy monitoring  
Rapid forming tube and film reel change-over - Wash-down execution
- 3 Wide range of pack styles (pillow, BB, Quattro) and films (laminate, LDPE, paper etc.)
- 4 Ultrasonics: drastic reduction of leak rate, film savings, energy saving

Unrivalled accessibility for maintenance and ergonomic design are the hallmarks of this game-changing piece of kit. The Ilapak Vegatronic 6000 continuous machine is suitable for a variety of fresh, frozen and dry products with great efficiency.

# TECHNICAL DATA

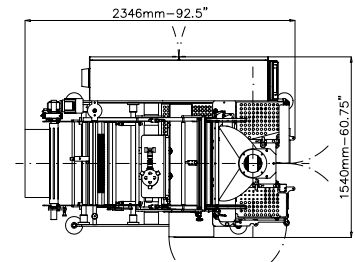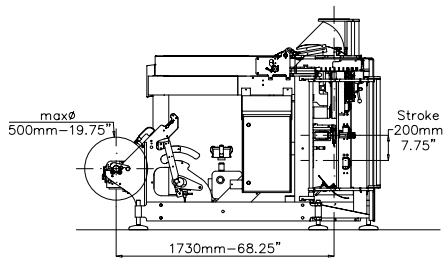

Machine Speed	210 cpm
Wrapping Materials	Heat sealable materials (laminate, co-extruded, recyclable, etc.), polyethylene
Electronic Platform	Industrial PC, Allen Bradley PLC*
Program Memory	100 programs
HMI	12" HMI colour touch screen TFT SVGA resolution, Allen Bradley*
Power Requirement	400 Vac ± 5%, 3 ph, neutral, GND, 50/60 Hz, 15.6 kW, 22.6 A
Compressed Air	up to 125 l/min at 5 bar (72.5 psi), up to 225 l/min at 5 bar (72.5 psi) for LDPE
Electrical cabinet	Right-hand version, left-hand version*
Machine dimensions (W x D x H)	1540 x 2346 x 1366 mm (60.75 x 92.5 x 53.75")
Machine finishing	Electrostatic epoxy powder coating, stainless steel*
Machine Weight	1600 kg (3530 lb)
<b>BAG DIMENSIONS</b>	
Max. width	280 mm (11"), 270 mm (10.5") for LDPE
Min. width	50 mm (2")
Max. length**	500mm (19.75")
<b>FILM REEL DIMENSIONS</b>	
Max. width	580 mm (22.75"), 630 mm (24.75")*
Max. outer diameter	500mm (19.75")
Core diameter	76 mm (3"), 152 mm (6")*

\* optional

\*\* greater length feasible on request