

VEGATRONIC 6000SD

CONTINUOUS VERTICAL FORM, FILL & SEAL MACHINE



MAIN FEATURES

- 1 Ultra-sanitary continuous VFFS machine
- 2 Revolutionary Open Frame design
- 3 Low product drop
- 4 Rapid change-over solutions




BENEFITS

- 1 Wash-down execution - Minimized area for debris accumulation
- 2 Unrestricted accessibility - Reduced maintenance downtime - Easy monitoring
- 3 Top performance with lowest cost of ownership
- 4 High Overall Equipment Efficiency (OEE)

Unrivalled HYGIENIC continuous VFFS machine designed in compliance with strictest USDA DAIRY standards.

Unlimited accessibility for easy maintenance and fast troubleshooting. Greatest uptime at lowest Total Cost of Ownership (TCO).

TECHNICAL DATA

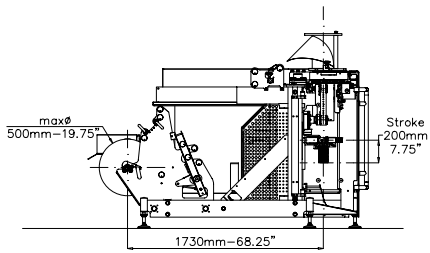

Machine Speed	210 cpm
Wrapping Materials	Heat sealable materials (laminates, co-extruded, recyclable, etc.), polyethylene
Electronic Platform	Industrial PC, Allen Bradley PLC*
Program Memory	200 programs
HMI	12" HMI colour touch screen TFT SVGA resolution, Allen Bradley*
Power Requirement	400 Vac \pm 5%, 3 ph, neutral, GND, 50/60 Hz, 15.6 kW, 22.6 A
Compressed Air	up to 125 l/min at 5 bar (72.5 psi), up to 225 l/min at 5 bar (72.5 psi) for LDPE
Electrical cabinet	Right-hand version, left-hand version*
Machine dimensions (W x D x H)	1505 x 2485 x 1396 mm (59.25 x 97.75 x 55")
Machine finishing	Electrostatic epoxy powder coating, stainless steel*
Machine Weight	1700 kg (3750 lb)
BAG DIMENSIONS	
Max. width	280 mm (11"), 270 mm (10.5") for LDPE
Min. width	50 mm (2")
Max. length**	500mm (19.75")
FILM REEL DIMENSIONS	
Max. width	580 mm (22.75"), 630 mm (24.75")*
Max. outer diameter	500mm (19.75")
Core diameter	76 mm (3"), 152 mm (6")*

* optional

** greater length feasible on request