

VEGATRONIC CF

INTERMITTENT VERTICAL FORM, FILL & SEAL MACHINE



MAIN FEATURES




- 1 High-quality entry-level VFFS
- 2 Maximum versatility
- 3 Compact footprint

BENEFITS

- 1 Can run a wide range of pack styles (Carry-fresh, pillow, block bottom) and seal options (two-holes, three-holes, euro-hole, etc.)
- 2 Suitable for traditional plastic films and recyclable paper-based films
- 3 Competitive speed

IMA Ilapak's Vegatronic CF (Carryfresh) is a robust, compact footprint intermittent machine conceived for packaging a variety of fresh products such as potatoes, onions, carrots and many more.

TECHNICAL DATA

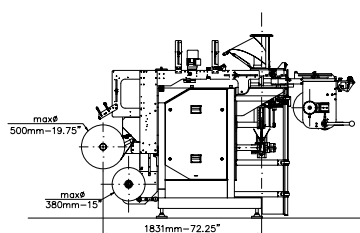

Machine Speed	80 cpm
Wrapping Materials	Heat sealable materials (laminate, co-extruded, recyclable, etc.), polyethylene
Electronic Platform	Omron PLC, Allen Bradley PLC*, Siemens PLC*
Program Memory	40 programs
HMI	Colour TFT 6" touch screen, Allen Bradley*, Siemens*
Power Requirement	AC 400 V +/- 5%, 3 phase, neutral, 50/60 Hz, 6.2 kW, 10,3 A
Compressed Air	up to 125 l/min at 5 bar (72.5 psi), up to 225 l/min at 5 bar (72.5 psi) for LDPE
Electrical cabinet	Right-hand version, left-hand version* or remote cabinet*
Machine dimensions (W x D x H)	2133 x 3159 x 1686 mm (84 x 124.5 x 66.5")
Machine finishing	Electrostatic epoxy powder coating, stainless steel*
Machine Weight	900 kg (1985 lb)
BAG DIMENSIONS	
Max. width	380 mm (15"), 370 mm (14.5") for LDPE
Min. width	50 mm (2")
Max. length**	380 mm (15")
FILM REEL DIMENSIONS	
Max. width	780 mm (30.75"), 830 mm (32.75")*
Max. outer diameter	500 mm (19.75")
Core diameter	76 mm (3"), 152 mm (6")*

* optional

** greater length feasible on request